

ERİŞİM TEKNİK OPTİK TURNİKELERİ

0-501

KASA FRAME

304 Kalite Paslanmaz Çelik Gövde
ve Cam Tabla
304 Quality Stainless Steel Body and
Glass Table

GÖSTERGELER INDICATORS

Giriş ve Çıkış Tarafında İki Renkli
Göstergeler Mevcuttur
Two Color Indicators Available on
Input and Output Sides

KONTROL CONTROL

Kuru Kontak / Her Türlü Kartlı Geçiş
Sistemi İle Çalışır
Dry Contact / All Kinds of Access Control
System

GÜVENLİK SECURITY

28 adet Karşılıklı Fotosel, Sıkışma Anında
Geri Gelebilmeye
28 Photocells, Recovery When jamming

KANAT WING


10mm Temper Cam
10mm Temper Glass

ACİL DURUM EMERGENCY

Enerji Kesildiğinde, Akü Desteksiz
El İle Açılabilir
When the Power is Cut, The Battery
Can Be Opened Manually Without
Support

ENERJİ 220V AC / FREKANS 50-60 HZ / MAKSİMUM GÜÇ 20 W DOUBLE TURNİKE 40 W / AKIM TÜRÜ VE DEĞERİ 2A DOUBLE TURNİKE 4.5A / IP 55 / GÜVENLİK SINIFI 1 / ÇALIŞMA SICAKLIĞI -20 +45 / ÇALIŞMA NEMİ %95 MAX.
GARANTİ SÜRESİ 2 YIL / KULLANIM SÜRESİ 10 YIL

ENERGY 220V AC / FREQUENCY 50-60 HZ / MAXIMUM POWER 20 W DOUBLE TURNSTILE 40 W / CURRENT TYPE AND VALUE 2A DOUBLE TURNSTILE 4.5A / IP 55 / SAFETY CLASS 1 / OPERATING TEMPERATURE -20 +45
OPERATING HUMIDITY 95% MAX. **WARRANTY PERIOD 2 YEARS / USAGE PERIOD 10 YEARS**

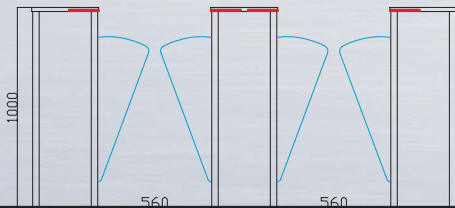

UYGULANABİLİR ÖZELLİKLER / APPLICABLE FEATURES



Kanatlara
Logo
Special Design and
Production



Üst Kapak Mermere
veya Pleksiglass
External Audible
Warning



IP 65'e Kadar
Uygulanabilir
Koruma Sınıfı
Applicable
Protection Class up
to IP 65