

KASA FRAME

304 Kalite Paslanmaz Çelik
Gövde ve Cam Tabla
304 Quality Stainless Steel
Body and Glass Table

GÖSTERGELER INDICATORS

Giriş ve Çıkış Tarafında İki
Renkli Göstergeler Mevcuttur
Two Color Indicators Available
on Input and Output Sides

KONTROL CONTROL

Kuru Kontak / Her Türlü Kartlı
Geçiş Sistemi ile Çalışır
Dry Contact / All Kinds of Access
Control System

GÜVENLİK SECURITY

28 adet Karşılıklı Fotosel, Sıkışma Anında
Geri Gelebilmeye
28 Photocells, Recovery When jamming

KANAT WING

10mm Temper Cam
10mm Temper Glass

ACİL DURUM EMERGENCY


Enerji Kesildiğinde, Akü
Desteksiz El ile Açılabilir
When the Power is Cut, The
Battery Can Be Opened
Manually Without Support

ERİŞİM TEKNİK
OPTİK TURNİKELERİ

0-511

ENERJİ 220V AC / FREKANS 50-60 HZ / MAKSİMUM GÜÇ 20 W DOUBLE TURNİKE 40 W / AKIM TÜRÜ VE DEĞERİ 2A DOUBLE TURNİKE 4.5A / IP 55 / GÜVENLİK SINIFI 1 / ÇALIŞMA SICAKLIĞI -20 +45 / ÇALIŞMA NEMİ %95 MAX.
GARANTİ SÜRESİ 2 YIL / KULLANIM SÜRESİ 10 YIL

ENERGY 220V AC / FREQUENCY 50-60 HZ / MAXIMUM POWER 20 W DOUBLE TURNSTILE 40 W / CURRENT TYPE AND VALUE 2A DOUBLE TURNSTILE 4.5A / IP 55 / SAFETY CLASS 1 / OPERATING TEMPERATURE -20 +45
OPERATING HUMIDITY 95% MAX. **WARRANTY PERIOD 2 YEARS / USAGE PERIOD 10 YEARS**

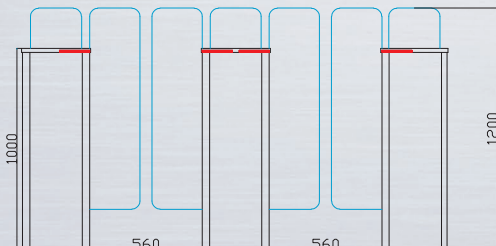

UYGULANABİLİR ÖZELLİKLER / APPLICABLE FEATURES



Kanatlara
Logo
Special Design and
Production



Üst Kapak Mermere
veya Pleksiglass
External Audible
Warning



IP 65'e Kadar
Uygulanabilir
Koruma Sınıfı
Applicable
Protection Class up
to IP 65