

#### KASA FRAME

304 Kalite Paslanmaz Çelik  
Gövde ve Cam Tabla  
304 Quality Stainless Steel  
Body and Glass Table

#### GÖSTERGELER INDICATORS

Giriş ve Çıkış Tarafında İki  
Renkli Göstergeler Mevcuttur  
Two Color Indicators Available  
on Input and Output Sides

#### KONTROL CONTROL

Kuru Kontak / Her Türlü Kartlı  
Geçiş Sistemi ile Çalışır  
Dry Contact / All Kinds of Access  
Control System

#### GÜVENLİK SECURITY

28 adet Karşılıklı Fotosel, Sıkışma Anında  
Geri Gelebilmeye  
28 Photocells, Recovery When jamming

#### KANAT WING

10mm Temper Cam  
10mm Temper Glass

#### ACİL DURUM EMERGENCY


Enerji Kesildiğinde, Akü  
Desteksiz El ile Açılabilir  
When the Power is Cut, The  
Battery Can Be Opened  
Manually Without Support

## ERİŞİM TEKNİK OPTİK TURNİKELERİ

# 0-522

ENERJİ 220V AC / FREKANS 50-60 HZ / MAKSİMUM GÜÇ 20 W DOUBLE TURNİKE 40 W / AKIM TÜRÜ VE DEĞERİ 2A DOUBLE TURNİKE 4.5A / IP 55 / GÜVENLİK SINIFI 1 / ÇALIŞMA SICAKLIĞI -20 +45 / ÇALIŞMA NEMİ %95 MAX.  
**GARANTİ SÜRESİ 2 YIL / KULLANIM SÜRESİ 10 YIL**

ENERGY 220V AC / FREQUENCY 50-60 HZ / MAXIMUM POWER 20 W DOUBLE TURNSTILE 40 W / CURRENT TYPE AND VALUE 2A DOUBLE TURNSTILE 4.5A / IP 55 / SAFETY CLASS 1 / OPERATING TEMPERATURE -20 +45  
OPERATING HUMIDITY 95% MAX. **WARRANTY PERIOD 2 YEARS / USAGE PERIOD 10 YEARS**

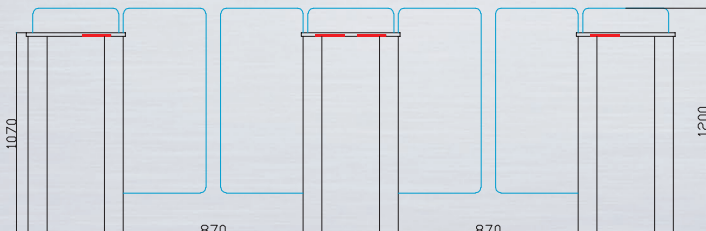

#### UYGULANABİLİR ÖZELLİKLER / APPLICABLE FEATURES



Kanatlara  
Logo  
Special Design and  
Production



Üst Kapak Mermere  
veya Pleksiglass  
External Audible  
Warning



IP 65'e Kadar  
Uygulanabilir  
Koruma Sınıfı  
Applicable  
Protection Class up  
to IP 65